

CL_{0.8} Cord Lift

Cord lift technology. Low voltage. Dual shaft.

The CL motor can provide continuous power and its simplified wiring solution is directly compatible with roman shading systems and cellular shades.



Bidirectional Communication

Automate Radio Communication utilizes two-way communication to provide up-to-date feedback on battery levels and shade positioning via the Automate Pulse 2 app.



Interchangeable Power Source

Choose to have your shades hard wired for continuous power or opt for a wire-free setup – choose from a rechargeable battery pack or a tube that holds AA batteries.



Favorite Positioning

Add a programmable shade position in addition to the upper and lower limits that can be defined as your "favorite."



Simplified Setup

Whether using a remote control or app for shade setup, Automate programming instructions are streamlined to have your shades moving as quickly as possible.



Precise Limit Adjustment

Incremental steps during limit settingallows for precise positioning of the shade.



Battery Check Action

When paired with Push5 remote, motor will move shade to indicate battery percentage.



Elegant Soft Stop

Slows the motor down for a smooth stop to prevent damage to the shade, and preserves the life of the battery.








Product Specifications


Part #: MT01-3001-069001 Cord Lift 0.8 Nm Motor

Voltage	12V DC	Limit Switch Type	Electronic
Torque	0.8 Nm	Current	1.18 A
Max Run Time	6 min	Battery Size/Type	External Battery Pack
Speed	33, 39, 50 RPM	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	I.CL.B
RF Modulation	FSK	Sound Level	60dB
IP Rating	IP40	Power	14W

Dimensions

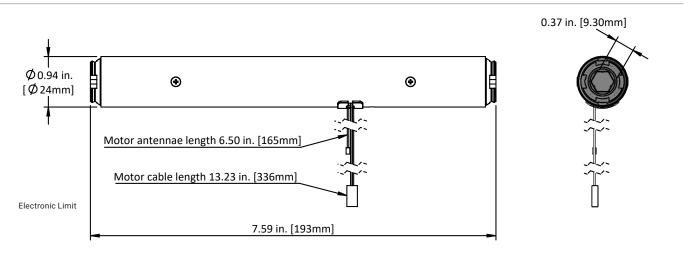

Compatible Parts

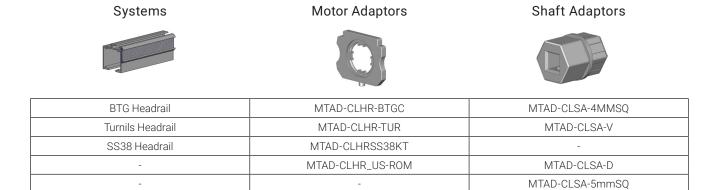

Compatible products (Refer to catalog for full item listings)

