

AUTOMATE | Li-ion 0.2


Part #: MTDCBRF18 - 0.2

Description: DC Tubular motor with RF control and in-built Lithium-ion rechargeable battery.


FEATURES

- Recommended max shade size 48" x 60"
- Leveling Control
- Simple limit setting and adjustment
- Favorite position
- 3 operational speed settings available
- 2 way RF communication
- Rechargeable built in Li-ion battery
- Up to 500 up & down cycles, per charge (based on recommended max shade size).
- Optional Solar powered charger
- New ARC protocol for simple programming

TECHNOLOGIES

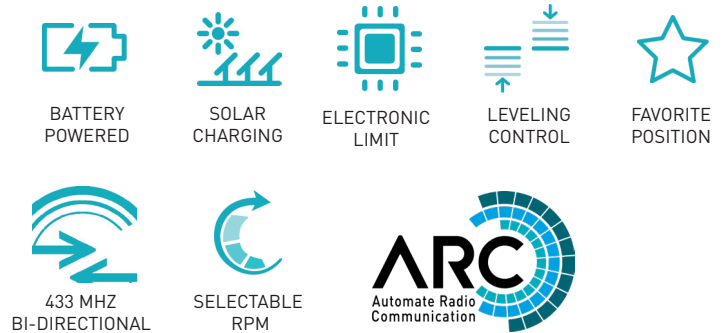

DIMENSIONS

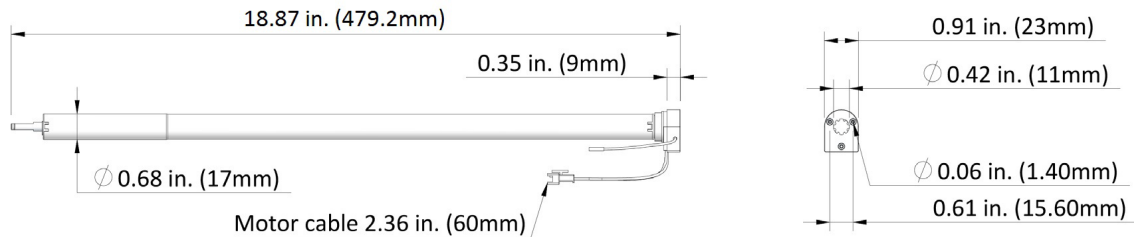

SPECIFICATIONS

Voltage	12	Limit Switch Type	Electronic
Torque	0.2Nm	Amps	0.42A
Max Run Time	10 Min	Battery Size/Type	800mAH
Speed	80 RPM (Adjustable to 60 or 40)	Temp Working Range	32°F to 140°F (0°C to 60°C)
Radio Frequency	433.92 MHz	Insulation Class	III
RF Modulation	FSK	Sound Level	~48
IP Rating	IP44		

Leading innovator of precision hardware and automated shade solutions.
USA | AUSTRALIA | EUROPE rolleaseacmeda.com